




First cold pressure and second hot pressure

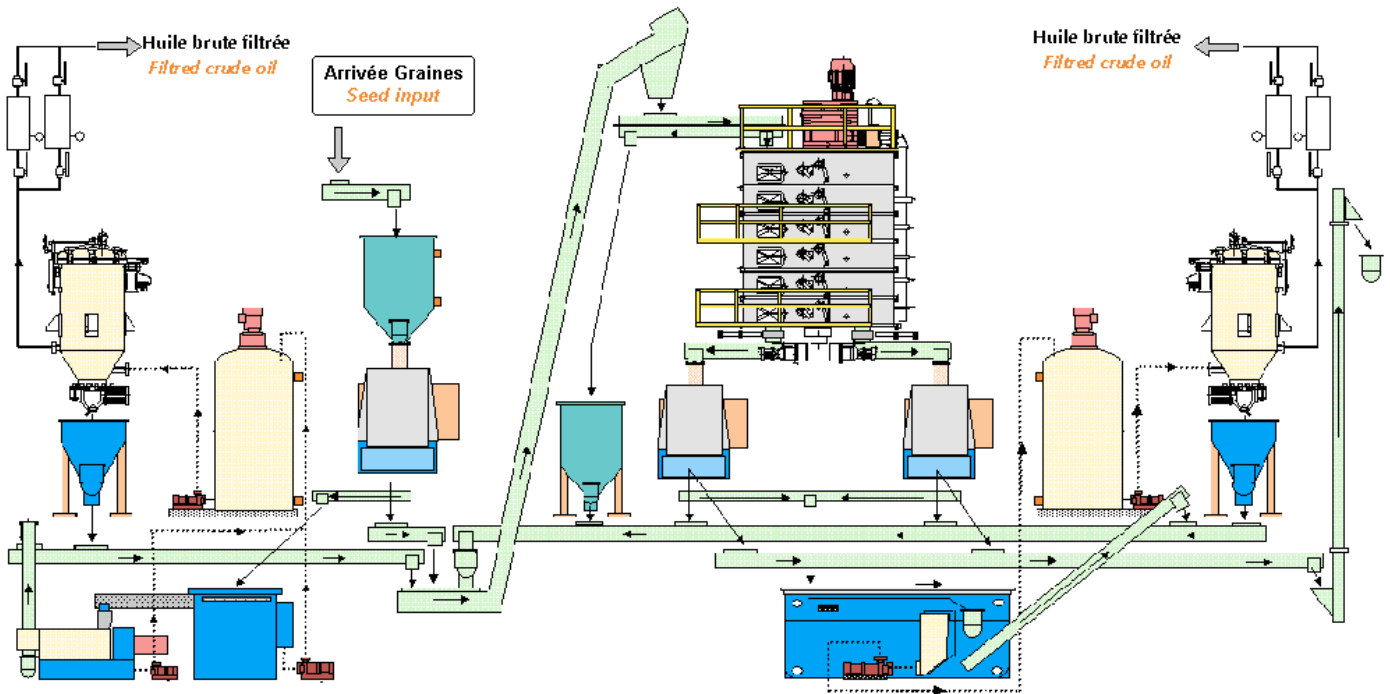

First cold pressure and second hot pressure (Press + Cooker + Press + Filtration (simple or double))

Advantages

- Two different oil qualities : 2/3 coming from cold pressure and 1/3 coming from hot pressure.
- Residual oil content 8%.
- Possibility of sediment recycling by conveying progressively in the cooker.

Disadvantages

- More expensive (Boiler).
- Energy consumption.
- Minimum capacity advised : 80 MTD.
- Necessity of double filtration if you wish two different oil qualities.